

Particulate Contamination is a Concern for Critical Product Contact Surfaces

EU Annex 1 Revision Section 8.48 - "Where materials, equipment, components and ancillary items are sterilised in sealed packaging or containers, the packaging should be qualified for minimizing the risk of particulate..."

Recent FDA Audit Observations have identified sterilization wrapping as the source of blue cellulose particulate material in pharmaceutical drug product.

What Does This Mean To You?

If used in the cleanroom, materials of cellulose/paper origin should be evaluated for risk to the process. This is especially critical for sterilization wrapping, as it is in direct contact with product contact parts and equipment.

STERIS's sterilization wrapping products are constructed of a spunbonded polyolefin material, which is manufactured,

processed and packaged in a certified cleanroom environment. Not only do these products minimize particulate introduction into critical processes, they also have superior microbial barrier properties when compared to cellulose materials.


Technical Information

Particle Generation Data

Peeling open a sealed sterilization wrapping pouch generates less than one-tenth the number of particles (0.5 and 5 microns in size) compared to a cellulose pouch. This is especially important when opening pouches containing pre-sterilized (irradiation, ethylene oxide) items and autoclaved equipment in critical environments (Grade A/Class 100/ISO 5 cleanrooms), where minimizing particles is imperative.



A laboratory simulation was conducted, demonstrating the process of wrapping and unwrapping equipment using STERIS's products is faster and generates significantly fewer particles when compared to using cellulose-based materials. The difference is greatest when the equipment and/or operations are complex.

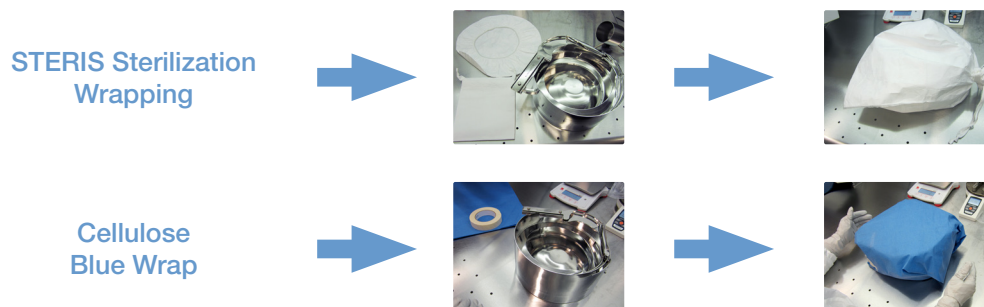

Particulate Contamination is a Concern For Critical Product Contact Surfaces



Recommendation

STERIS's sterilization wrapping should be used instead of cellulose based sterilization wrapping. The material protects critical surfaces, without introducing particulate of cellulose/paper origin.



The product contact surface on the stopper bowl is protected using a fitted, elasticized cover.



Covered equipment is placed into a bag as secondary protection during sterilization, storage, and transport to the manufacturing area.



An elasticized cover acts as the primary barrier, while the drawstring bag adds a second layer of protection. Utilizing a "gooseneck" style closure for the bag ensures a tortuous path to prevent microbial and particulate ingress.



Product contact surfaces of a filling needle assembly are protected using a small drawstring bag.



Filling needle and tubing assembly with ends covered are placed within a polyolefin/film sterilization pouch.



After sterilization, the assembly is removed from the sterilization pouch. Filling needles remain protected until the primary cover is easily removed in an aseptic manner at the time of use.

All company and product names are trademarks of STERIS, its affiliates or related companies, unless otherwise noted. ©2025 STERIS